


Venue Player for Synchronized Venue Playback of Multiple Uncompressed Video Sequences


The Venue Player DP is a compact, reliable, multiple output video and audio server supporting either four 2K/HD or one 4K/UHD RGB 8 or 10 bit outputs from a single 1RU system package. Storage of up to eight terabytes allows for hours of playout of 100% uncompressed RGB 4:4:4, 10 bit video per output. The Venue Player DP allows a mix of resolutions to be output if required.

Additionally, Venue Player DP includes an output warp and blend option for applying multiple output edge blending, keystone and geometry correction for curved or flat projection surfaces.

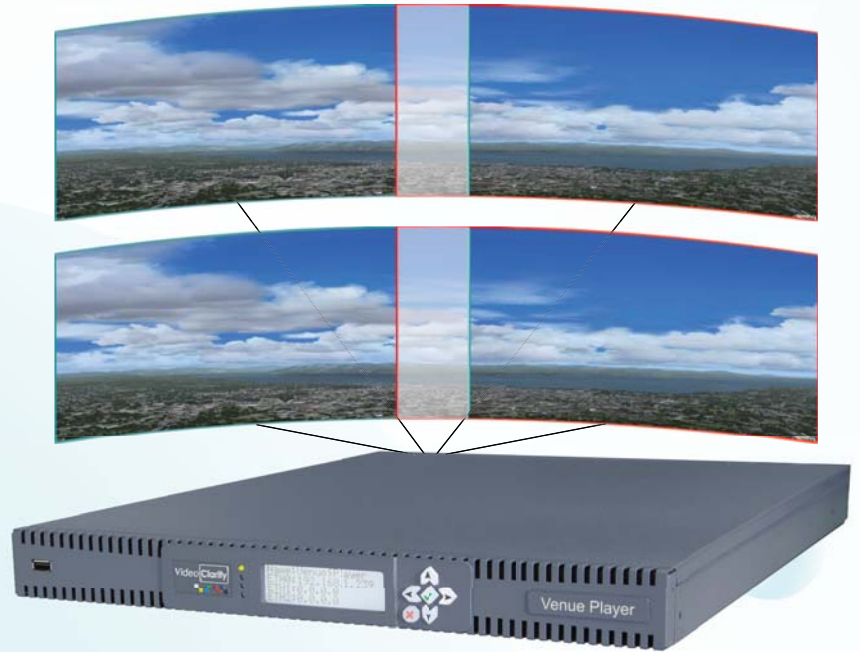

Main Control Interface


The Venue Player's main control function is via Venue Player GUI or the browser based Venue Player Manager which can control video sequences in several ways. One or more units can be instructed to start playout based on system clock time that is NTP synchronized. Play commands can be applied to one or several sequences at a time. Each unit has a direct user interface via keyboard & mouse, or full set up and playback control via networked device such as a tablet or laptop with web browser. All functions can also be accessed from a simple command line scripting interface.

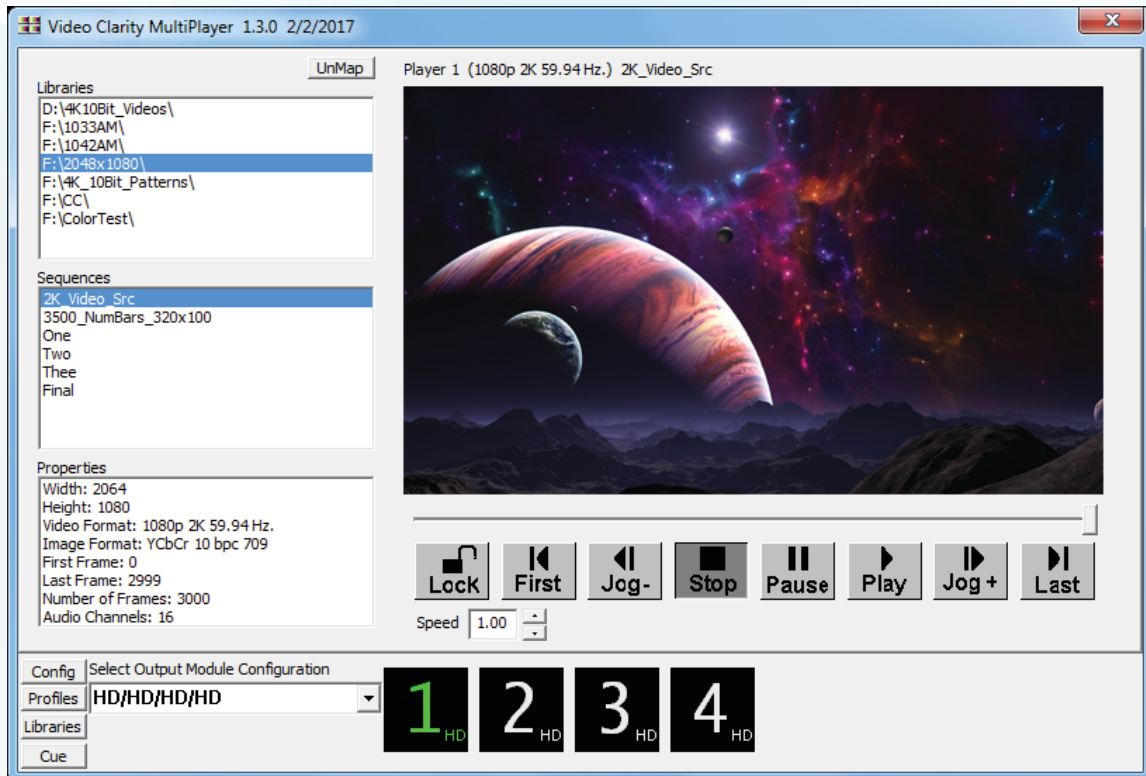

Venue Player with Display Port Key Features

- Four simultaneous Display Port video outputs
- NTP timing for multi-unit synchronized start
- Two gigabit NICs for control/status redundancy
- Front panel LCD display and keypad for setup, control and IP network connection status
- Warp and blend option for seamless set up and playback of multiple outputs as one image
- ClearView Player for IP record and single or dual playback functions

The included ClearView Importer provides decode and import of most any file format such as uncompressed BMP, DPX, QuickTime, TIFF and also compressed file formats such as J2K, H.264, H.265, ProRes and many more. For a complete list of supported file formats please visit the Video Clarity website.

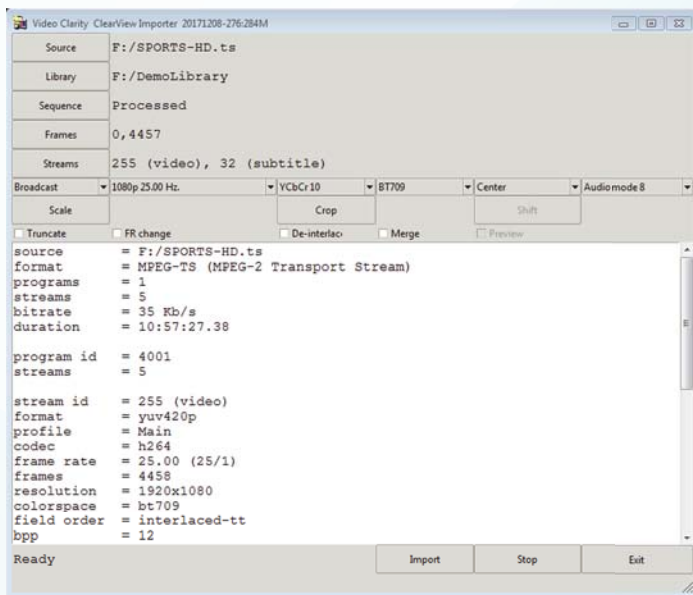

ClearView Venue Player DP - One rack unit size system with two storage capacity options



| | | | |
|--|--|---|---|
| Models: CVVP-1084-DP-4 CVVP-1084-DP-8 | Storage: 4.0 TB or 8.0 TB Desktop Display Output: VGA | Power: 100 - 240VAC, 47-63Hz, Autodetect, 300 watts max. | Dimensions: 16.75" W x 1.75" H x 21.5" D 42.6 cm x 4.5 cm x 54.7 cm |
| Includes: Venue Player GUI, ClearView Player, Venue Player Manager, CV-Importer, CLI interface, SMB/BNC conversion cables (10), user guide, 1RU rack rails | Video Output: Display Port 1.2 Four Display Port outputs configurable as - 4 1920x1080p up to 60Hz RGB 4:4:4 10 bit - 4 2048x1080p up to 60Hz RGB 4:4:4 10 bit - 1 3840x2160p up to 60Hz RGB 4:4:4 10 bit - 1 4096x2160p up to 60Hz RGB 4:4:4 10 bit | IP Network Interface: 2 - 1000baseT - RJ45 | Weight: 18 lbs, 8.2 Kg |
| | | Option: CVVP-WB-1L Warp and blend application option | Temperature: Operating 0 - +40 celsius Storage -20 - +50 celsius |
| | | | Rel. Humidity: 5 - 95%, noncondensing |

Product design and specifications are subject to change without notice or obligation. Video Clarity, Inc. Dolby and the double-D symbol are registered trademarks of Dolby Laboratories.