


# ClearView Player 8K

Uncompressed 8K/4K/HD/SD  
Recorder/Player



Video **Clarity**



Tools for Video Analysis

ClearView Player 8K, a professional, highly reliable broadcast recorder-player.

This ClearView Player - Recorder is ideal when an uncompressed video source is needed for all types of manual or programmed playback.

The ClearView Player 8K provides uncompressed recording and playback for venues and also review, analysis and performance testing from standard definition up to 8K resolutions and frame rates.

#### Applications:

- Highest quality programmed venue playback
- Encoder/decoder testing
- Display calibration
- Signal path integrity checking
- Lab facility uncompressed A/V player/server
- Long-haul network test source
- On-location 4K or 8K uncompressed recorder
- On-air broadcast player

The ClearView Player includes many of the popular uncompressed test sequences and also allows for easy recording of additional test sequences. A new sequence can either be input from an 8K camera or automatically imported from any of the file import formats shown on the right or it can be recorded from digital inputs.

Each sequence may be trimmed with in and out points set. Using the Venue Player application or command line interface, any video sequence can be grouped with other sequences and played synchronously or in a defined order.

The VANC and audio can be optionally turned on or off to allow complete sequence structural freedom.

#### The ClearView Player 8K:

- An uncompressed video player with 16 3G HD-SDI interfaces programmable for recording or playback
- A multi-sequence player for playing up to two 4K or sixteen HD or SD videos at the same time

## ClearView File Importer

### Imported File Formats (partial list)

Accom YUV CCIR 601 8-bit  
ARI Raw Bayer Pattern  
Avid AVR, DS HD/SD, DV (\*.gen)  
Avid Meridian, Y'CbCr, OMFI (\*.omf, \*.omfi)  
AVR, JFIF, JPED, Meridian, RGB, Y'CbCr  
Cineon (\*.cin), CineWave  
DPX RGB 8, RGB 10, Y'CbCr 4:2:2  
DV (\*.dv, \*.dif), Digital Negative (\*.dng)  
DVS Direct File Format (\*.dvs)  
DVSD, DV25, DV50, MPEG-I, mJPEG, DigiSuite  
H.261, H.263, H.264, H.265, HDV  
Headerless/Raw (\*.hdr, \*.yuv, \*.rgb, \*.raw)  
HiCon SLB32 RFB format (\*.slb)  
Image (\*.gif, \*.jpg, \*.png), Jaleo Direct Format (\*.js)  
JPEG, JPEG2000, Media 100 MJPEG  
Microsoft AVI (\*.avi), BMP, DIB Files (\*.dps)  
MJPEG, MPEG 1 4:2:0 (\*.mpg, \*.mpeg)  
MPEG 2 Elem. Stream, (4:2:0/4:2:2), MPEG2 (\*.m2v)  
MPEG 2 Program Stream, (4:2:0/4:2:2)  
MPEG 2/4 in Transport Stream, (4:2:0/4:2:2)  
MPEG 2/4 in MPTS (4:2:0, 4:2:2), MPEG4 (\*.m4v)  
MPEG 4/AVC Elementary Stream 4:2:0/4:2:2, (\*.h264)  
MPEG-H HEVC/H.265 4:2:0 Main Profile (\*.h265)  
MXF Format (DV, DVCPro50, MPEG, IMX)  
Newtek Video Toaster (\*.rtv)  
Phantom Support (\*.cine), PhotoShop FilmStrip (\*.flm)  
Photo CD PCD, Photoshop PSD, Portable anymap PNM  
Portable Bitmap Format PBM DPS  
Portable graymap PGM  
Portable pixmap PPM  
Profile GXF Format/SMPTE-360 (\*.gxf)  
QuickTime Movies (\*.mov)  
QuickTime formats w/proper codec, ProRes, etc...  
RealVideo (\*.ra, \*.rm, \*.ram), Red Camera Stream (\*.r3d)  
Run-Length encoding (\*.rle)  
SGI Movie Format (\*.mv), SGI RGB  
Silicon Image Bayer (\*.siv), Sun Raster (\*.ras)  
Targa TGA, ICB, VDA, VST, Targa 3000, TIFF, TIF  
v210 Y'CbCr 10 Bit, VC-1 Pro, Viewstore (\*.vsr)  
vcap, vcap10, Windows Media (\*.asf, \*.wmf, \*.wmv)  
Y'CbCr 8/10, Y'CbCr, RGB, YCrCb 8/RGGB

### Audio Import Formats


Dolby® Digital Plus Professional Decoder (option)  
MPEG-2 Layer 1 (\*.mp1)  
MPEG-2 Layer 3 (\*.mp3)  
Waveform Audio (\*.wav)  
Adaptive Multi-rate (\*.amr)  
Audio Interchange File Format (\*.aiff)  
Windows Media Audio (\*.wma)  
Advanced Audio Coding (\*.aac)

### Exported File Formats

QuickTime with up to 16 audio channels  
Microsoft AVI (\*.avi), BMP  
Headerless/Raw (\*.yuv, \*.rgb, \*.raw)



## ClearView Player 8K - 8K Recorder / Player with Venue Player

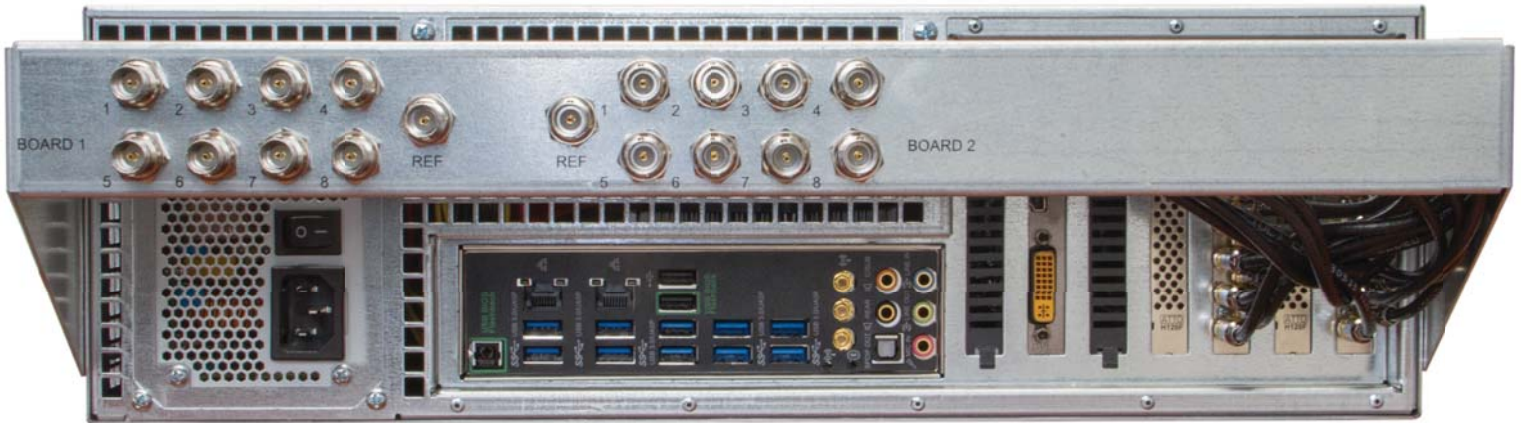

<p><b>Models:</b> CVVP-3088-8K-8 CVVP-3088-8K-16 CVVP-3088-8K-32</p> <p><b>Includes:</b> ClearView Player, Venue Player, CV File Importer, user guide, keyboard, mouse, sync generator w/cables, 3 RU rack kit</p>	<p><b>Storage:</b> 16 TB or 32 TB</p> <p><b>Format I/O:</b> ITU-601, SMPTE259,292,296,424,425 a/b,QuadHD</p> <p><b>Video I/O:</b> - 16 HD/SD-SDI in or 16 out (BNC) - Up to 7680x4320p @ 60Hz, 4:2:2, 8 or 10 bit</p> <p><b>Timecode:</b> SMPTE-12M on HDSDI</p> <p><b>Reference Input:</b> 2 BNC - Tri-level HD sync</p>	<p><b>Power:</b> 100 - 240VAC, 47-63Hz, Autodetect, 700 Watts Max</p> <p><b>Audio I/O:</b> 24 bit, 48 KHz PCM, or DD+ in and out - 16 channel embedded audio in or out on one BNC</p> <p><b>Option:</b> VC-DDP - Dolby® Digital Plus Input Decoder</p>	<p><b>IP Network Inputs:</b> 2 - 1000baseT - RJ45</p> <p><b>Dimensions:</b> 17" W x 5.25" H x 31.5" D 43 cm x 13.5 cm x 80 cm</p> <p><b>Weight:</b> 50 lbs, 22.7 Kg</p> <p><b>Temperature:</b> Operating +5 - +25 Celsius Storage -20 - +50 Celsius</p> <p><b>Rel. Humidity:</b> 5 - 95%, noncondensing</p>
--	---	--	---

<p><b>Video Formats Supported:</b></p> <p><b>8K</b> 7680x4320p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60 Hz</p> <p><b>4K</b> 3840x2160p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60 Hz</p>	<p><b>HD</b> 720p 50, 50.94, 60 Hz 1080i 50, 59.94, 60 Hz 1080p 23.98, 24, 25, 29.97, 30, 50, 59.94, 60 Hz</p> <p><b>SD</b> 525i 59.94 Hz 625i 50 Hz</p>	<p><b>Play/Record Duration Examples Per Product Model:</b></p> <table border="0"> <tr> <td><b>Video Standard</b></td> <td><b>8 TB</b></td> <td><b>16 TB</b></td> <td><b>32 TB</b></td> </tr> <tr> <td>7680x4320@60p, 10-bit, 4:2:2</td> <td>27 min.</td> <td>54 min.</td> <td>108 min.</td> </tr> <tr> <td>7680x4320@60p, 8-bit, 4:2:2</td> <td>36 min.</td> <td>72 min.</td> <td>144 min.</td> </tr> <tr> <td>3840x2160@60p, 10-bit, 4:2:2</td> <td>107 min.</td> <td>215 min.</td> <td>431 min.</td> </tr> <tr> <td>3840x2160@60p, 8-bit, 4:2:2</td> <td>144 min.</td> <td>288 min.</td> <td>575 min.</td> </tr> </table>	<b>Video Standard</b>	<b>8 TB</b>	<b>16 TB</b>	<b>32 TB</b>	7680x4320@60p, 10-bit, 4:2:2	27 min.	54 min.	108 min.	7680x4320@60p, 8-bit, 4:2:2	36 min.	72 min.	144 min.	3840x2160@60p, 10-bit, 4:2:2	107 min.	215 min.	431 min.	3840x2160@60p, 8-bit, 4:2:2	144 min.	288 min.	575 min.
<b>Video Standard</b>	<b>8 TB</b>	<b>16 TB</b>	<b>32 TB</b>																			
7680x4320@60p, 10-bit, 4:2:2	27 min.	54 min.	108 min.																			
7680x4320@60p, 8-bit, 4:2:2	36 min.	72 min.	144 min.																			
3840x2160@60p, 10-bit, 4:2:2	107 min.	215 min.	431 min.																			
3840x2160@60p, 8-bit, 4:2:2	144 min.	288 min.	575 min.																			

Product design and specifications are subject to change without notice or obligation. Video Clarity, Inc.  
Dolby and the double-D symbol are trademarks of Dolby Laboratories